
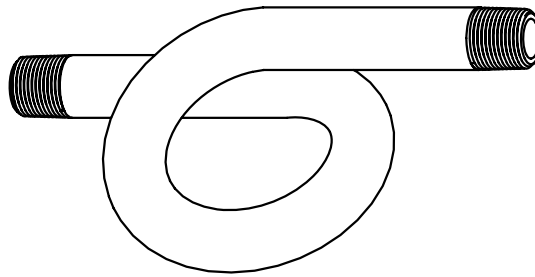


SPECIFICATIONS				
MODEL NO.	MATERIAL	CONNECTION	SIZE	
			A	B
SP2110	SCH 40 WELDED STEEL	1/4NPT	5.5(139.7)	2.5(63.5)
SP2210		1/2NPT	8.875(225.425)	4.0(101.6)
SP2120	SCH 40 SEAMLESS PIPE BRASS	1/4NPT	5.5(139.7)	2.5(63.5)
SP2220		1/2NPT	8.875(225.425)	4.0(101.6)
SP2130	SCH 40 SS304 WELDED PIPE	1/4NPT	5.5(139.7)	2.5(63.5)
SP2230		1/2NPT	8.875(225.425)	4.0(101.6)
SP2140	SCH 40 SS316 WELDED PIPE	1/4NPT	5.5(139.7)	2.5(63.5)
SP2240		1/2NPT	8.875(225.425)	4.0(101.6)
SP2111	SCH 80 WELDED STEEL	1/4NPT	5.5(139.7)	2.5(63.5)
SP2211		1/2NPT	8.875(225.425)	4.0(101.6)
SP2121	SCH 80 SEAMLESS PIPE BRASS	1/4NPT	5.5(139.7)	2.5(63.5)
SP2221		1/2NPT	8.875(225.425)	4.0(101.6)
SP2131	SCH 80 SS304 WELDED PIPE	1/4NPT	5.5(139.7)	2.5(63.5)
SP2231		1/2NPT	8.875(225.425)	4.0(101.6)
SP2141	SCH 80 SS316 WELDED PIPE	1/4NPT	5.5(139.7)	2.5(63.5)
SP2241		1/2NPT	8.875(225.425)	4.0(101.6)

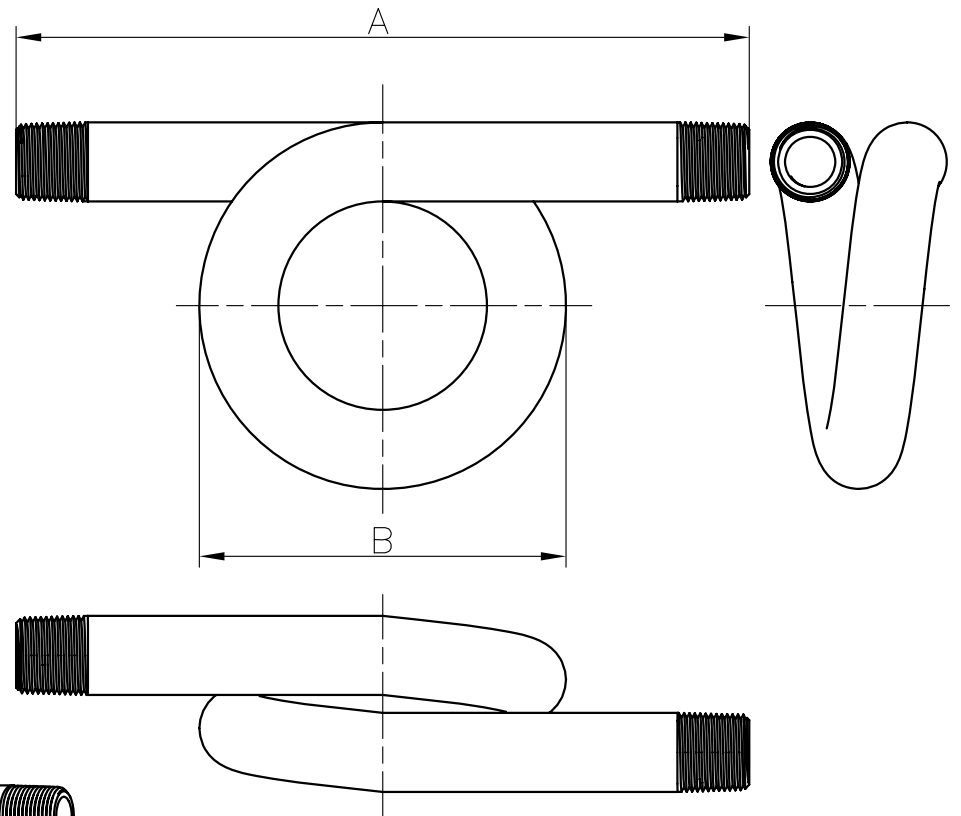

Dimensional Tolerances Unless Otherwis Specified
Machining
Fractione:±1/64,Angle:±0.005
Declmais:Two Place ±0.01 Three Place ±0.005
Unmarked Surface Finishe 125 or Beeffc
Castings:
<1":±1/64", 1"--12":±1/32", >12":±1/16"
Angles:±1",Concentricity .03 T.L.R.

REV	DESCRIPTION			BY	DATE
	BY	DATE		BY	DATE
DRAWN	Hongwang	03/24/12	CHECKED	Binmeng	03/24/12
SUPERSEDED	Yuanqingniu	03/24/12	APPROVEL	Rongsun	03/24/12
ADD	Server\jishu-public\technical\syphons				

COIL SYPHONS (180°)

MARK

Howe

HOWE PRECISION INDUSTRIAL INC.